

imageRUNNER ADVANCE C5500 III series

HIGH PERFORMANCE OFFICE COMMUNICATION PLATFORM



Canon uniFLOW Online
Outstanding Cloud Output Management Solution




Canon Inc.
ImageRUNNER ADVANCE C5550i
Outstanding 31- to 40-ppm A3 Colour MFP



Canon Inc.
ImageRUNNER ADVANCE C5550i
Outstanding 41- to 50-ppm A3 Colour MFP

MAIN CONFIGURATION OPTIONS

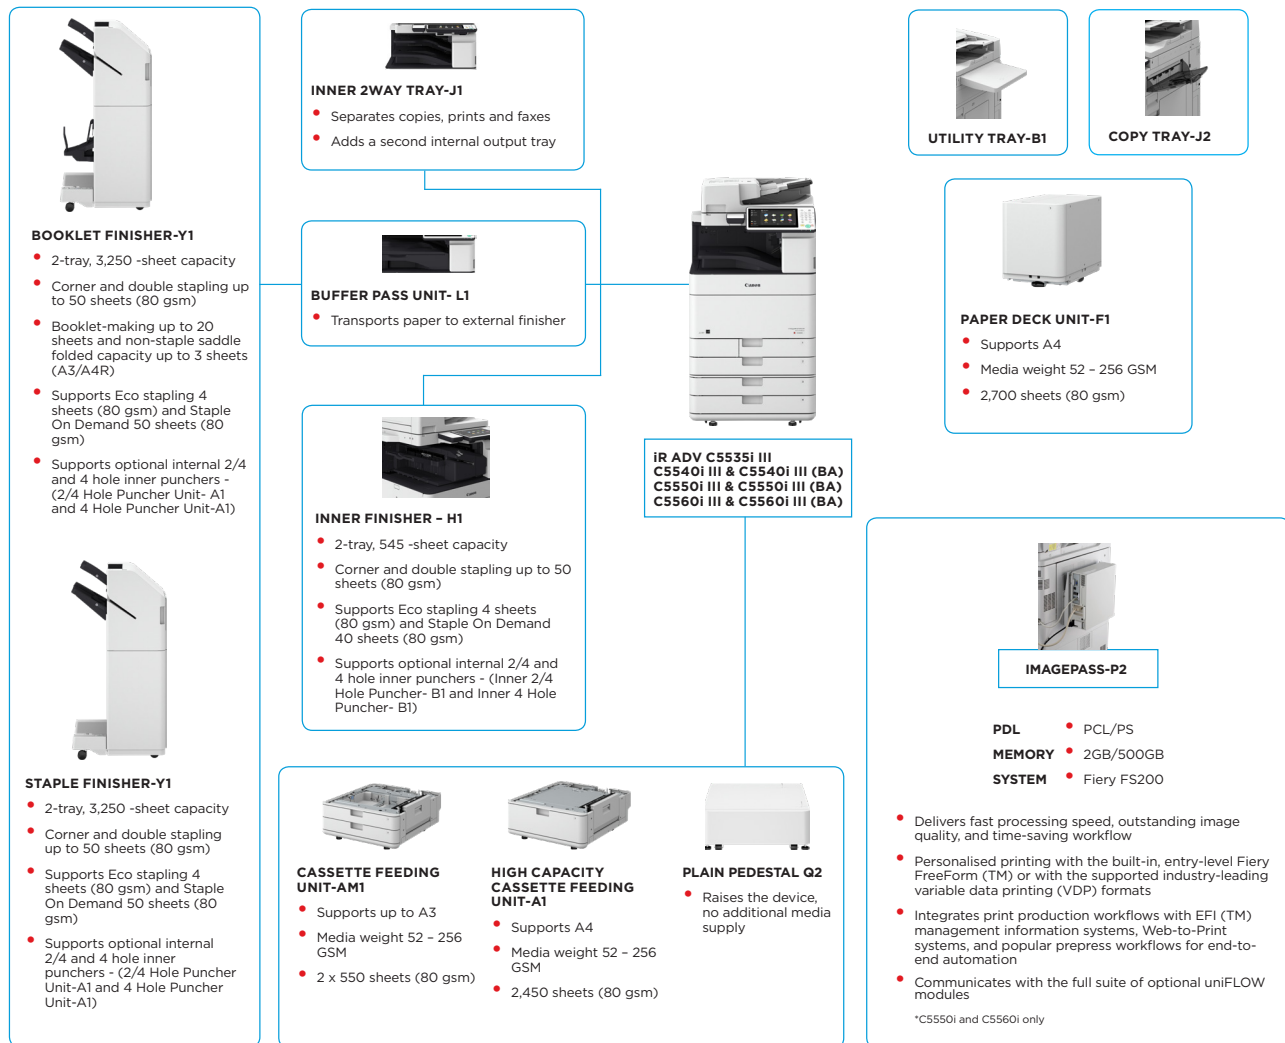

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online product configurator.

III* indicates that this model has been upgraded to new system software and includes additional security features as standard.



TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE C5500 III series

MAIN UNIT		PRINT SPECIFICATIONS	
Machine type	A3 Colour Laser Multifunctional	Print Speed (BW/CL)	iR-ADV C5560i III 60 ppm (A4), 32 ppm (A3), 36 ppm (A4R), 60 ppm (A5R), 60 ppm (A6R)
Core functions	Print, Copy, Scan, Send, Store and Optional Fax		iR-ADV C5550i III 50 ppm (A4), 27 ppm (A3), 30 ppm (A4R), 50 ppm (A5R), 50 ppm (A6R)
Processor	Canon Dual Custom Processor (Shared)		iR-ADV C5540i III 40 ppm (A4) 22 ppm (A3), 24 ppm (A4R), 40 ppm (A5R), 40 ppm (A6R)
Control Panel	25.6 cm (10.1 inch) TFT LCD WSVGA Colour Touch panel	Print Resolution (dpi)	iR-ADV C5535i III 35 ppm (A4), 18 ppm (A3), 23 ppm (A4R), 35 ppm (A5R), 35 ppm (A6R)
Memory	Standard: 4.0GB RAM	Page description languages	600 x 600, 1,200 x 1,200 (up to) Standard: UFR II, PCL 6, Genuine Adobe PostScript Level 3
Hard Disk drive	Standard: 250GB Maximum: 1TB	Direct Print	Direct printing available from USB memory, Advanced Space, Remote UI and Web Access* Supported file types: TIFF, JPEG, PDF, EPS, and XPS * Only PDF print from websites is supported
Mirroring Hard Disk Drive	Optional: 250GB, 1TB	Printing from mobile and cloud	AirPrint, Mopria, Google Cloud Print, and Canon PRINT Business, and uniFLOW Online. A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n); Optional: NFC, Bluetooth Low Energy OTHERS Standard: USB 2.0 (Host) x2, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Serial Interface, Copy Control Interface	Fonts	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2 PS fonts: 136 Roman *1 Requires optional PCL International Font Set-A1 *2 Requires optional Barcode Printing Kit-D1
Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets 2 x 550-sheet cassettes, 100-sheet multi-purpose tray Maximum: 6,350 sheets (with HIGH CAPACITY CASSETTE FEEDING UNIT-A1 + PAPER DECK UNIT-F1)	Print Features	Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secured Print, Watermark, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold Printing
Paper output capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 3,450 Sheets (with STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1 and COPY TRAY-J2)	Operating System	UFR II: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016, MAC OS X (10.7 or later) PCL: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016 PS: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016, MAC OS X (10.7 or later) PPD: MAC OS X (10.7 or later), Windows 7 / 8.1 / 10
Finishing capabilities	Standard: Collate, Group With Inner Finisher : Collate, Group, Offset, Staple, Hole Punch*1, Staple-Free Staple, Staple On Demand With External Finisher*2 : Collate, Group, Offset, Staple, Saddle Stitch*3, Hole Punch*4, Staple-Free Staple, Staple On Demand *1 Requires Inner 2/4 Hole Puncher-B1 or Inner 4 Hole Puncher-B1 *2 Requires Buffer Pass-L1 *3 Requires Booklet Finisher-Y1 *4 Requires 2/4 Hole Puncher Unit-A1 or 4 Hole Puncher Unit-A1	Supported media types	SAP Device Types are available via the SAP Market Place. Please refer to http://www.canon-europe.com/support/business-product-support for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable.
Supported media types	Upper Cassette 1: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Bond, Envelope, Letterhead Lower Cassette 2: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Tab*, Bond, Envelope, Letterhead *Requires TAB FEEDING ATTACHEMENT-F1 Multi-purpose tray: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Tracing*, Label, Tab, Bond, Coated, Envelope, Letterhead * Some types of tracing paper cannot be used.	Supported media sizes	
Supported media sizes	Upper Cassette 1: Standard size: A4, A5, A5R, A6R (Simplex only), B5, Envelope [No.10 (COM10), DL, ISO-C5] Custom size: Min. 98.0 x 148.0 mm up to 297.0 x 215.9 mm Lower Cassette 2: Standard size: A3, A4, A4R, A5, A5R, A6R (Simplex only), B4, B5, B5R, Envelope [No.10 (COM10), Monarch, DL, ISO-C5] Custom size: Min. 98.0 x 182.0 mm up to 304.8 x 457.2 mm Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Envelopes [No. 10(COM 10), Monarch, ISO-C5, DL] Envelope Custom Size (Min. 98.0 x 98.4 mm up to 320.0 x 457.2 mm). Custom Size: Min. 98.0 x 139.7 mm up to 320.0 x 457.2 mm Free Size: Min. 98.0 x 139.7 mm up to 320.0 x 457.2 mm	Supported media weights	
Supported media weights	Cassettes: 52 to 256 gsm Multi-purpose tray: 52 to 300 gsm Duplex: 52 to 220 gsm	Warm-up Time	
Warm-up Time	From Power On: 10 Seconds or less* * Time from device power-on, until copy ready (not print reservation). From Sleep Mode: 10 Seconds or Less Quick Startup Mode: 4 Seconds or less* * Time from device power-on to when key operation can be performed on the touch panel display.	Dimensions (W x D x H)	
Dimensions (W x D x H)	iR-ADV C5560i III/C5550i III/C5540i III/iR-ADV C5535i III: 620 x 742 x 950 mm [iR-ADV C5560i III/C5550i III/C5540i III (BA models) : 620 x 866 x 950 mm]	Installation Space (W x D)	
Installation Space (W x D)	iR-ADV C5560i III/C5550i III/C5540i III/iR-ADV C5535i III Basic: 980 x 1,176 mm (Right Cover Open + Cassette Drawers Open) Fully Configured: 1,866 x 1,176 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open) [iR-ADV C5560i III/C5550i III/C5540i III (BA models) : Basic: 980 x 1,300 mm (Right Cover Open + Cassette Drawers Open) Fully Configured: 1,866 x 1,300 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open)]	Weight	
Weight	iR-ADV C5560i III/C5550i III/C5540i III/iR-ADV C5535i III: Approx. 142 kg including toner [iR-ADV C5560i III/C5550i III/C5540i III (BA models) : Approx. 143 kg including toner]	Copy SPECIFICATIONS	
		Copy Speed (BW/CL)	iR-ADV C5560i III 60 ppm (A4), 32 ppm (A3), 36 ppm (A4R), 60 ppm (A5R), 60 ppm (A6R)
			iR-ADV C5550i III 50 ppm (A4), 27 ppm (A3), 30 ppm (A4R), 50 ppm (A5R), 50 ppm (A6R)
			iR-ADV C5540i III 40 ppm (A4) 22 ppm (A3), 24 ppm (A4R), 40 ppm (A5R), 40 ppm (A6R)
			iR-ADV C5535i III 35 ppm (A4), 18 ppm (A3), 23 ppm (A4R), 35 ppm (A5R), 35 ppm (A6R)
		First-Copy-Out Time (A4, BW/CL)	iR-ADV C5560i III: Approx. 2.9/4.5 seconds or less iR-ADV C5550i III: Approx. 3.5/5.2 seconds or less iR-ADV C5540i III: Approx. 4.1/6.1 seconds or less iR-ADV C5535i III: Approx. 4.9/7.4 seconds or less
		Copy resolution (dpi)	Reading: 600 x 600 Printing: Up to 1,200 x 1,200
		Multiple Copies	Up to 999 copies
		Copy Density	Automatic or Manual (9 Levels)
		Magnification	25% - 400% (1% Increments)
		Preset Reductions	25%, 50%, 70%
		Preset Enlargements	141%, 200%, 400%
		Basic Copy Features	Preset R/E Ratios by Area, Paper Setting, Previous Setting, Favourite Setting, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel
		Special Copy Features	Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Density Adjustment, Original Type Selection, Transparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Job Done Notice, Mirror Image, Print on Tab, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Detect Feeder Multi Sheet Feed, Free Size Original
		SCAN SPECIFICATIONS	
		Type	Colour Platen and Single-pass Duplexing Automatic Document Feeder*7 [2-sided to 2-sided (Automatic)] * Detect Feeder Multi Sheet Feed is supported.
		Document Feeder Paper Capacity * (80 gsm)	150 Sheets

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE C5500 III series

Acceptable Originals and weights

Platen: Sheet, Book, 3-Dimensional Objects (Height: Up to 50 mm, Weight: up to 2kg)

Supported media sizes

Document Feeder media weight:
1-sided scanning: 38 to 157 gsm (BW) /64 to 157 gsm (CL)
2-sided scanning: 50 to 157 gsm (BW) /64 to 157 gsm (CL)
Platen: max. scanning size: 297.0 x 431.8 mm
Document Feeder media size: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6R,
Custom size: 128.0 x 139.7 mm to 304.8 x 431.8 mm

Scan Speed (ipm: BW/CL; A4) 7

Single-sided Scanning:
80 /80 (300dpi) , 80 /60 (600 dpi)
Double-sided Scanning: 160 /160 (300dpi) , 150 /80 (600 dpi)

Scan Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100i, 150 x 150, 100 x 100

Pull Scan Specifications

Colour Network ScanGear2. For both TWAIN and WIA
Supported OS: Windows 7/8.1/10
Windows Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016

Scan Method

Send functionality available on all models
Scan to USB Memory: Available on all models
Scan to Mobile Devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices or cloud-based services depending on your requirements. Please contact your sales representative for further information.
TWAIN/WIA Pull scanning available on all models

Scanning software

Network ScanGear:
TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device

SEND SPECIFICATIONS

Destination

E-mail/Internet FAX (SMTP), SMB v3.0, FTP, WebDAV, Mail Box, Super G3 FAX(Optional), IP Fax(Optional)

Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

Send resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100

Communication protocol

File: FTP (TCP/IP), SMB v3.0, WebDAV
E-mail/I-Fax: SMTP, POP3

File Format

Standard: TIFF, JPEG, PDF (Limited Colour, Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b, Encrypted), XPS (Compact, Searchable), Office Open XML (PowerPoint, Word), PDF/XPS (Device Signature)
Optional: PDF (Trace & Smooth), PDF/XPS (User Signature)*

Universal Send Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages, Detect Feeder Multi Sheet Feed

FAX SPECIFICATIONS

Maximum Number of Connection Lines

2

Modem Speed

Super G3: 33.6 kbps *

Compression Method

G3: 14.4 kbps

Resolution (dpi)

MH, MR, MMR, JBIG
400 x 400, 200 x 400, 200 x 200, 200 x 100

Sending/Recording Size

A3, A4, A4R, A5*, ASR*, B4, B5*, B5R*
*1 Sent as A4
*2 Sent as B4

FAX memory

Up to 30,000 pages *

Speed dials

Max. 200

Group dials/destinations

Max. 199 dials

Sequential broadcast

Max. 256 addresses

Memory backup

Yes

Fax Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density (for Scanning), Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Selecting the Telephone Line, Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed

STORE SPECIFICATIONS

Mail Box (Number supported)

100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes, 30,000 Maximum Pages Stored

Advanced Space

Communication Protocol: SMB or WebDAV
Supported Client PC: Windows (Windows 7/8.1/10)
Concurrent Connections (Max.): SMB: 64, WebDAV: 3 (Active Sessions)

Advanced Space available disc space

Approx. 16GB (Standard HDD)
Approx. 480GB (with option 1TB HDD)

Advanced Space Features:

Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

Memory Media

Standard: USB Memory

SECURITY SPECIFICATIONS

Authentication

Standard: Universal Login Manager (Device and Function Level Log-in), uniFLOW Online Express*, User Authentication, Department ID Authentication, Access Management System
Optional: My Print Anywhere secure print (Requires uniFLOW)
* No charge for this solution; however activation is required.

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (AES-256bit/CBC, FIPS140-2 Validated), Common Criteria Certification (DIN ISO 15408)
Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, Data Loss Prevention (Requires uniFLOW)

Network

Document

ENVIRONMENTAL SPECIFICATIONS

Operating Environment

Power source

Plug (Main Unit)

Power consumption

Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME

Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device signature, Secure Watermarks
Optional: User signature, Document Scan lock

Temperature: 10 to 30 °C
Humidity: 20 to 80 % RH (Relative Humidity)
220-240 V (±10 %), 50/60 Hz (±2 Hz), 6 Amp
CEE 7/7 (230V)

Maximum: Approx. 1,800 W

Printing: Approx. 906 W *1

Standby: Approx. 64.8 W *1

Sleep mode: Approx. 0.8 W*2

Plugin Off: Approx. 0.13W*3

*1 Reference value: measured one unit

*2 0.8W is not available in all circumstances due to certain settings.

*3 Reference value, Quick start mode OFF

Sound Power Level (LwAd)

iR-ADV C5535i III:
Active(BW): 71.8 dB or Less*1, Active(CL): 71.8 dB or Less*1, Standby: 40 dB*2

iR-ADV C5540i III:
Active(BW): 72.5 dB or Less*1, Active(CL): 72.5 dB or Less*1, Standby: 40 dB (BA model: 38 dB)*2

iR-ADV C5550i III:
Active(BW): 73.7 dB or Less*1, Active(CL): 73.7 dB or Less*2, Standby: 40 dB (BA model: 38 dB)*2

iR-ADV C5560i III:
Active(BW): 74.7 dB or Less*1, Active(CL): 74.7 dB or Less*1 *9, Standby: 40 dB (BA model: 38 dB)*2

Sound Pressure (LpAm)

Bystander's position¹⁵: (1-sided/2-sided)

iR-ADV C5535i III:
Active(BW): 51/49 dB*2, Active(CL): 51/49 dB*2, Standby: 24 dB*2

iR-ADV C5540i III:
Active(BW): 52/50 dB (BA model: 54/51 dB)*2, Active(CL): 52/50 dB (BA model: 54/51 dB)*2, Standby: 25 dB (BA model: 21 dB)*2

iR-ADV C5550i III:
Active(BW): 53/51 dB (BA model: 54/51 dB)*2, Active(CL): 53/51 dB (BA model: 54/51 dB)*2, Standby: 24 dB (BA model: 21 dB)*2

iR-ADV C5560i III:
Active(BW): 54/52 dB (BA model: 55/53 dB)*2, Active(CL): 55/53 dB (BA model: 55/54 dB)*2, Standby: 24 dB (BA model: 21 dB)*2

*1 DE-UZ205 (2017) compliant
(*Data taken from Blue Angel Standard value)

*2 Reference value: measured only one unit with ISO7779, described with ISO9296 (1988)

5535i and BA models

Standards

CONSUMABLES

Toner Cartridges

C-EXV 51 TONER BK/C/M/Y

C-EXV 51L TONER C/M/Y

Toner Yield

(Estimated @ 5% Coverage)

C-EXV 51 TONER BK: 69,000 pages

C-EXV 51 TONER C/M/Y: 60,000 pages

C-EXV 51L TONER C/M/Y: 26,000 pages

SOFTWARE AND PRINTER MANAGEMENT

Tracking and reporting

Universal Login Manager* (ULM): Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device. uniFLOW Online Express: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location.
*Installation, activation & registration required

Remote management tools

iW Management Console:
Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management)

eMaintenance:
Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance)

Content Delivery System:
Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web based interface to each device that helps to provide remote device management and control

FIERY PRINT CONTROLLER SPECIFICATIONS (EMBEDDED)

Optional/Standard

Name

Print Resolution (dpi)

Page Description Language(s)

Memory

Hard Disk Drive

Optional on all models
imagePASS P2 (Embedded)

1200 x 1200, 600 x 600

Adobe PS3, PCL6

4GB (1 x 4GB)

500 GB SATA



TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE C5500 III series

Processor Speed	Intel Pentium G4400 (3.3 GHz)		
System	Fiery FS350		
Fonts	PS: 138 Fonts PCL: 113 Fonts		
Supported Operating Systems	Windows 7 32 and 64 bit / Windows 8.1 32 and 64 bit / Windows 10 32 and 64 bit / Windows Server 2012 64bit only / Windows Server 2012 R2 64bit only / Windows Server 2016 R2 64bit only / MAC OS (10.11, 10.12, 10.13, 10.14)		
Interface	2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB3.0 x 2 (Rear), USB2.0 x 4 (Rear)	Staple Finisher-Y1 (External)	Eco Staple: A3/A4/B4/B5: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm) Staple On Demand: 40 sheets (80 gsm) Dimensions (W x D x H): 466 x 525 x 225 mm Weight: Approx. 8.6 kg (Requires BUFFER PASS UNIT- L1) Number of Trays: 2 Upper Tray Capacity*: A4, A5, A5R, A6R, B5: 250 sheets, SRA3, A3, A4R, B4, B5R: 125 sheets Lower Tray Capacity*: A4, A5, A5R, B5: 3,000 sheets (Thin: 1500 sheets), SRA3, A3, A4R, B4, B5R: 1,500 sheets, A6R: 250 sheets (52 to 105 gsm), 50 sheets (106 to 300 gsm) * with 81.4 gsm paper Paper Weight: Upper Tray 52 to 256 gsm, Lower Tray 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: Corner and Double Stapling: A4/B5: 50 sheets (52 to 90 gsm) A3/B4/A4R: 30 sheets (52 to 90 gsm) Eco Staple: A3/A4: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm) Staple On Demand: 50 sheets (90 gsm) Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended) Weight: Approx. 31 kg (Requires BUFFER PASS UNIT- L1) (Includes the above STAPLE FINISHER-Y1 basic staple specifications.) Saddle Stitch paper size: A3, A4R, B4, Custom Size (195.0 x 270.0 mm to 304.8 x 457.2 mm) Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet up to 256 gsm) Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm) Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended) Weight: Approx. 57 kg (Requires the INNER FINISHER-H1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes A3, A4, A4R, A5, B4, B5, B5R Four holes A3, A4 Power Source: From the Main Unit (Requires the INNER FINISHER-H1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R Power Source: From the Main Unit (Requires either the STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes A3, A4, A4R, A5, B4, B5, B5R Four holes A3, A4 Power Source: From the Main Unit (Requires either the STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R Power Source: From the Main Unit
Network protocols	TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port9100, SNT, 802.1X, DHCP, DNS, NTP)		
Direct Print	PDF1.7, EPS, TIFF6, JDF1.4/JMF(OP)		
VDP	FreeForm v1, v2.1		
Fiery Print Controller Standard Features	Fiery Command WorkStation 6 / Paper Catalog / Fiery Spot-On / Fiery Remote Scan		
Fiery Print Controller Options	Fiery Impose / Fiery Compose / Fiery Impose and Compose / Productivity Package Web Activate (Include Fiery JDF) / Fiery Hot Folders & Virtual Printers	Booklet Finisher-Y1 (External)	
HW Platform	E400		
Base OS	Debian of Linux		
Power source	AC100-240V, 50Hz/60Hz, 3.0A (100V) - 1.3A (240V)		
Maximum Power consumption	47 W		
Dimensions (H x W x D)	285 x 93 x 295 mm		
Weight	Fiery unit only (with plate): 4.95 kg		
PAPER SUPPLY OPTIONS			
Plain Pedestal Type - Q2	Substituted for the cassette feeding unit, the pedestal raises the device, without adding further paper capacity.		
Cassette Feeding Unit-AM1	Paper Capacity: 2 x 550 sheets (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Bond, Letterhead Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Custom size: 98.0 x 182.0 mm to 304.8 x 457.2mm Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 620 x 700 x 251 mm Weight: Approx. 22.5 kg		
High Capacity Cassette Feeding Unit-A1	Paper Capacity: 2,450 sheets (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Bond, Letterhead Paper Size: A4 Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 620 x 700 x 251 mm Weight: Approx. 30.0 kg	Inner 2/4 Hole Puncher-B1	
Paper Deck Unit - F1	Paper Capacity: 2,700 sheets (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Bond, Letterhead Paper Size: A4, B5 Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 344 x 630 x 440 mm Weight: Approx. 31 kg	Inner 4 Hole Puncher-B1	
OUTPUT OPTIONS		2/4 Hole Puncher Unit-A1	
Copy Tray-J2	Provides a simple tray for basic output needs. Capacity: 100 sheets (A4, 80 gsm)		
Inner 2-Way Tray-J1	Allows the separation of copies, prints and faxes. Adds a second internal output tray to give a combined output capacity of 350 sheets (upper tray 100 sheets/lower tray 250 sheets). (A4, 80 gsm)	4 Hole Puncher Unit-A1	
Inner Finisher-H1 (Internal)	Number of Trays: 2 Upper Tray Capacity*: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 45 sheets Lower Tray Capacity*: A4, A5, A5R, B5: 500 sheets, SRA3, A3, A4R, B4, B5R, : 250 sheets, A6R: 30 sheets (64 to 300 gsm) * with 81.4 gsm paper Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: Corner and Double Stapling: A4/B5: 50 sheets (52 to 90 gsm) A3/B4/A4R: 30 sheets (52 to 90 gsm)	OTHER OPTION Consumables	STAPLE-P1 - For stapling (2 x 5,000 pcs) (for Staple Finisher-Y1/Booklet Finisher-Y1 or Inner Finisher-H1) STAPLE CARTRIDGE-Y1 - For saddle stitching (2 x 2,000 pcs) (for Booklet Finisher-Y1)

For a complete list of all Hardware accessories, please refer to our website specifications page or online product configurator.

Software & Solutions



Certifications and compatibility



	Canon Ireland 3006 Lake Drive Citywest, Saggart Co. Dublin, Ireland Telephone No: 01 2052400 Facsimile No: 01 2052525 canon.ie	Canon (UK) Ltd Woodhatch Reigate Surrey RH2 8BF Telephone No: 01737 220000 Facsimile No: 01737 220022 canon.co.uk	Canon Inc. canon.com Canon Europe canon-europe.com English edition © Canon Europa N.V., 2019
---	---	--	---